

ORIGINAL PAPER

Open Access

The research design of graphene inclusion on LDPE characterization



Mazyiar Sabet^{1*}  and Hassan Soleimani²

Abstract

A progressive trend in instructional materials is the analytical plan and manufacture of fundamental operating equipment. LDPE/Gr nanocompounds were researched using various techniques such as Raman spectra (RS), XRD, SEM, and TEM based on Gr distribution, morphology, and crystal structure. The results presented by SEM showed that the addition of Grs was distributed homogeneously in the LDPE matrix and improved the crystallinity of the LDPE/Gr nanocompounds. Inclusion of Grs to LDPE launches crystallization by reducing the activation energy accompanied by increasing crystallization. Gr distribution in LDPE has considerably enhanced the nucleation of LDPE crystallization in nanocompound LDPE/Gr. The crystallization rates clearly increased to 0.5 wt% and continued to rise up to 3 wt% with Gr loading. Adding Gr to LDPE makes LDPE/Gr nanocompounds develop crystallinity Gr as a nucleating agent advances the process of crystallization, the size of crystallite, and the percentage of LDPE/Gr crystallinity throughout the nanocompounds with an additional Gr to the polymer matrix. This research also demonstrates that by further incorporation of Gr in the LDPE matrix, the activation energy of crystallinity is lowered. The inclusion of Gr extends crystallinity level and simultaneously creates local nanocompound lattice uniformity.

Keywords: Graphene, Low-density polyethylene, Nanocompounds, Characterization, Composite

Background

Recent advancement in nanotechnology has driven attention to be focused on a specific type of material identified as polymer nanocompounds where nanodimensional fillers are added to a polymer framework to create mechanical and physical characteristics (Lia, González, Heeralala, & Wang, 2018; Papageorgiou et al., 2018; Sabet & Soleimani, 2017). Nanofiller is a significant factor in the growth of polymer properties and nanocompounds that are generally light with exclusive mechanical and accurate practical properties (Feng et al., 2018; Sabet & Soleimani, 2018; Xu, Liang, Xiaoling, Guisong, & Ding, 2018). The huge aspect ratio for nanofillers creates further contact between polymer links and nanofillers to develop complicated interfacial morphology once connected with pristine polymers (Feng et al., 2017; Sabet, Soleimani, Hassan, & Ratnam, 2014; Yuan et al., 2017). Gr's true impact is prevented by accumulation resulting from its enormous surface area and aspect ratio and strong Van der Waals

pulling energy between Gr layers (Huang et al., 2014a; Sabet, Hassan, & Ratnam, 2015/2013; Xu, Zhang, Xu, & Li, 2016). The accumulation of Gr therefore offers restricted contact with the polymer framework and weakened Gr's efficient role in the polymer structure (Huang et al., 2014; Liu, Yan, Fang, & Wang, 2014; Sabet & Syafiq, 2013). Although this nanofiller is required to be consistently disseminated in polymers for the use of the massive surface zones of Grs, Grs will accumulate and the massive surface regions cannot be definitely accomplished. A number of tests have confirmed that adding a filler to a polymer with a nanodimensional size shows severe and concrete improvements in the final product's physical, chemical, and mechanical characteristics compared to the similar filler status but in micro-dimensional size (Li et al., 2014; Sabet, Savory, Hassan, & Chantara, 2013; Wang, Wei, Qian, & Liu, 2014).

The differences between regular reinforcement and nanodimensional fillers are defined via a reduction in nanoparticles' scales that raises contacts in interconnection with polymeric structure, generating so-called "nanoeffects" in nanocompound structures (Hong et al., 2014; Soleimani et al., 2015, 2016). For example, in several categorizations, a

* Correspondence: mazyiar_sabet@yahoo.com

¹Petroleum and Chemical Engineering, Universiti Teknologi Brunei (UTB), Bandar Seri Begawan, Brunei Darussalam

Full list of author information is available at the end of the article

nanocompound filler with at least one nanometric dimension aspect is recognized: zero-dimensional, mono-dimensional, and bi-dimensional (Dittrich, Wartig, Hofmann, Mülhaupt, & Schartel, 2013; Maziyar, Hassan, & Hosseini, 2018; Sabet, Hassan, & Ratnam, 2013b). Gr is a 2D and single-sheet hybridized carbon sp² configuration that has attracted the attention of many researchers due to associated outstanding characteristics, such as outstanding electrical conductivity, flame retardants, and magnificent mechanical and thermal stability (Dittrich et al., 2013; Huang, Chen, Liang, Wang, & Gao, 2013; Maziyar, Hassan, & Erfan, 2018). For several suitable materials (Huang et al., 2014c; Maziyar & Hassan, 2018; Woehrl, Ochedowski, Gottlieb, Shibasaki, & Schulz, 2014), the appropriate fantastic things in collaboration with the fundamental manufacturing and performing supply provides Grs with a wonderful nanofiller.

Grs' thickness differs to a few nanometers, although the other sides are within the micron gauge range, affecting a notable aspect ratio and enormous surface area (2620–2960 m²/g for exclusively delaminated Gr). In contrast to nanoclays, Gr shows less mass density and, in relation to the lack of spreading electron phenomena, exposes an outstanding electrical and thermal conductivity due to sp²-hybridized carbon atom connections (Boyd et al., 2015; Kaindl et al., 2015; Sabet, Hassan, & Ratnam, 2013c). Gr-holding nanocompounds are used for various purposes, such as electronic and electrical fields (Sabet, Soleimani, & Seyednooroldin, 2016; Yimin, Yuzhou, Guoqiang, & Tieling, 2017; Zhou & Gao, 2017). In any professional laboratory, however, tremendously unique characteristics of Gr and Gr polymer nanocompounds are still being researched. If a Gr nanocompound structure is under stress, the stress transfers from polymer to Gr, causing a large crossing point area between polymer and Gr to reinforce nanocompound mechanical characteristics (Sabet & Soleimani, 2014; Zhou, Gui, Hu, Jiang, & Tang, 2016; Zhou, Gui, & Hu, 2016). Gr nanocompounds appear to be more appropriate in operation than other standard fillers because they have a huge surface-to-volume ratio of 600–10,000 (Bengin, 2017; Chen, Ma, & Jiao, 2016; Liu, Fang, Yan, Chevali, & Wang, 2016). Grs' 2D composition conveys a 2D path that proposes a huge link to the LDPE framework, which increases nanocompound thermal conductivity (Hosseini et al., 2015; Srinivasan, Francis, & Purushothaman, 2017; Vijayasarithi, Suresh, & Rajaram, 2016). For example, its molecular arrangement is not porous even for very small molecules similar to H₂ or noble gasses, and it shields electromagnetic waves such as ultraviolet, visible, infrared, and microwaves. In addition, the mechanical features are amazing and confirmed Young's module is about 1 TPa (Bettina, Karen, Daniel, Rolf, & Bernhard, 2013; Kuo et al., 2014; Sabet, Soleimani, & Seyednooroldin, 2019; Zhou, Ning, & Wang, 2015).

This research paper highlighted that Gr inclusions advance nucleation techniques in the preliminary crystallization stages recognized by decreasing active energy. Gr nanocompounds were also regarded to have wonderful oxygen penetration resistance due to cavity sizes at the Gr and LDPE interface, so Gr nano-based polymers could be used as a substitute material in the fabrication of gas tanks in the near future (Lia et al., 2018; Papageorgiou et al., 2018). The purpose of this research paper is to formulate, manufacture, and characterize additional inclusion of Grs in LDPE. LDPE is mainly used because of low price, excellent film manufacturing, excellent physical and chemical power, and harmlessness. In this study, it was found that the inclusion of Grs decreases the rate of decreasing crystallinity at upper temperatures in the LDPE structure, which was demonstrated by the energy activation experiment. The activation energy testing showed the rise in nanocompound relative crystallinity with the integration rate. Meanwhile, Gr's incorporation expands the amount of crystallinity and develops local nanocompound lattice uniformity. LDPE is reusable, suitable for packing purposes, and is designated by way of a polymeric structure as a result of its substantial business significance. LDPE is also used primarily as an engineered thermoplastic for packaging purposes. This study attempts to advance knowledge in a Gr polymer composites region by examining the impact of Gr inclusion enhancement on certain features of LDPE/Gr nanocompounds for various applications.

Methods

Materials

LDPE in pellet form, category of LH0075, density of 0.921 g.cm⁻³, and a melt flow index of 0.89 g (10 min)⁻¹, was secured from Bandar Imam Petrochemical Company (Iran). Graphene with purity higher than 98 wt%, size 2–10 μm, thickness, 1–3 nm, specific exterior contact, 500–700 m² g⁻¹, density of 5–10 mg/ml, and black color was bought from Nano-arranged and Amorphous Materials Incorporation.

Material preparations

LDPE-graphene nanocompounds are prepared by a Haake MinilabII, a mini-lab twin screw blender, at 190 °C for 10 min and a screw speed of 100 rpm due to the melt-compounding method. Graphene inclusion is modified at 0.5, 1, and 3 wt percent in each batch. Specimens are prepared for categorizations and examinations using a 190 °C carver press casting.

Characterization

The morphology test was performed on the surface of samples using 25 KV scanning electron microscopy (SEM) (FEI, Quanta 200-ESEM). Specimens were covered for

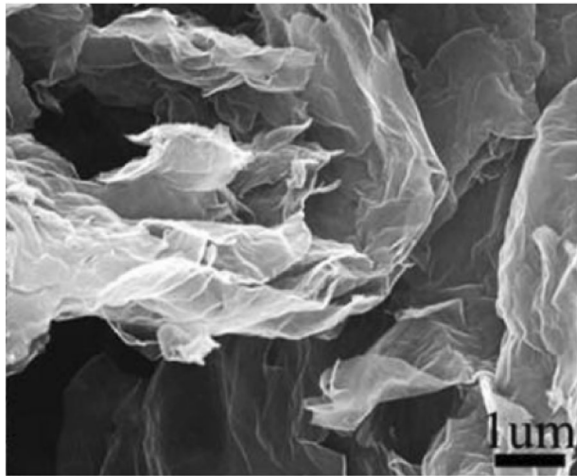


Fig. 1 Gr structure via SEM

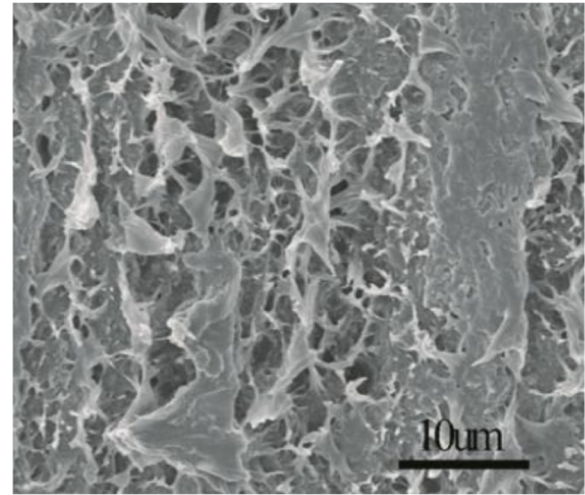


Fig. 3 LDPE/Gr 3 wt% structure via SEM

running SEM test using a lean conductive carbon layer. In order to evaluate the nanocomposite structure, x-ray diffraction (XRD) was performed by Bruker D-2 phaser, made in Germany, with $\text{CuK}\alpha$ radiation ($\lambda = 1.54 \text{ \AA}$), 30 kV voltage, and 10 mA current. The scanning was performed with a $5^\circ/\text{min}$ ratio from $5\text{--}80^\circ$. A JEM-200F (JEOL, Japan) transmission electron microscopy (TEM) with an accelerating voltage of 200 KV was used to find the setup of Gr and LDPE nanocomposites; ultra-fine powders were dispersed in alcohol by ultra-sonics and assembled by a particular TEM support film. Using 514 nm argon ion laser, Raman spectra (RS) was tested on Lab RAM-HR800 Spectrometer (Horiba, Japan). DSC-200F3 (Netzsch Geratebau GmbH, Germany) performed the DSC test. The specimens with a weight range of 2–4 mg were warmed up to 160°C from -40°C with an increase of $10^\circ\text{C}/\text{min}$ in ambient condition.

Results and discussion

Categorization analysis

Figures 1, 2, 3, 4, 5, 6, and 7 provide the physical-chemical characterization tests such as SEM, TEM, and XRD. The SEM shows the microstructure of the formed composite including the dubs of the nanosheets. XRD is used to identify nanocomposite, graphene, and LDPE crystalline material. Figure 1 exhibits the SEM figure of Gr that confirms a complete delamination at 1000°C . It does not observe many wrinkles on the surface of the Gr layers. This particular surface structure helps to reduce accumulation and promotes its LDPE interfaces.

The SEM outcomes of pristine LDPE and Gr nanocomposite are shown in Figs. 2, 3, and 4 with 3 wt% Gr. LDPE's external face is a bit rough (Fig. 2), and with expanding preference, it reveals the upright direction.

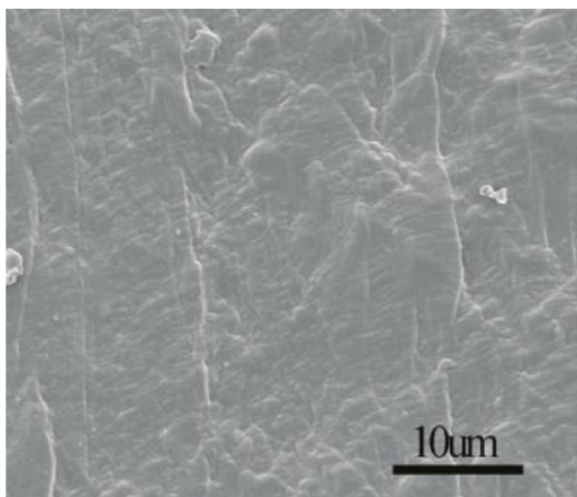


Fig. 2 LDPE structure via SEM


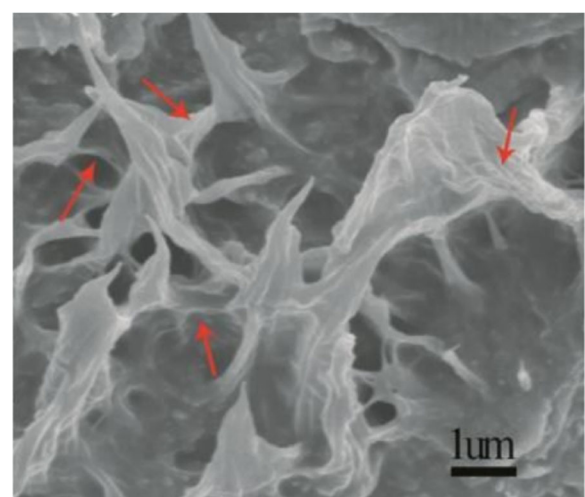


Fig. 4 LDPE/Gr 3 wt% structure via SEM


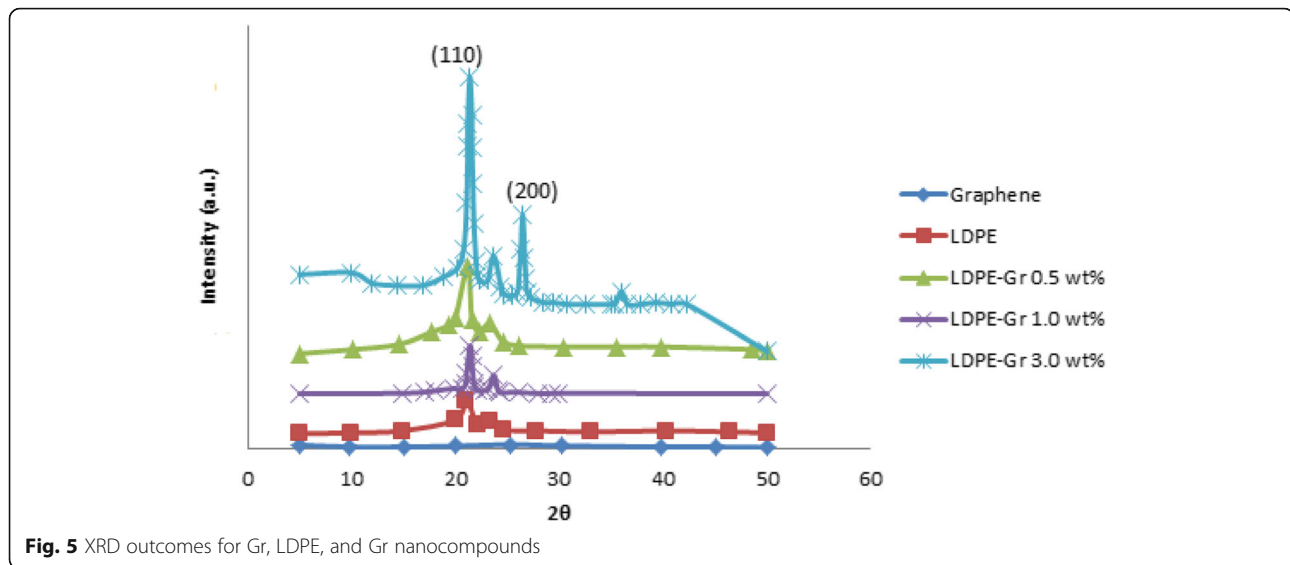


However, a direction is in connotation with an extended preference of 3.0 wt% for Gr nanocompound. Folded lamellar Gr is observed through the highly accurate LDPE/Gr 3.0 wt% SEM image, designated with red arrows in Fig. 4.

Figure 5 reveals the XRD results of pure Gr, LDPE, and different inclusion of Gr in LDPE nanocompounds. The nanosheet interlayer distance was determined using XRD data, and the results were obtained under the same conditions. The graphene nanosheet XRD pattern showed complete disappearance of the distinctive peaks, which can be explained in a monolayer by graphene exfoliation, leading in a new lattice structure. The XRD results reveal the high level of Gr accumulation due to its high specific surface area; this experience is shown in

Fig. 5 as a wide-ranging weak diffraction peak nearby 26°. The peak at 26° associates in (002) of graphite. Two peaks at $2\theta = 20.96^\circ$ and 23.21° are assigned to (110) and (200) lattice planes of LDPE in nanocompounds. Increasing of Gr inclusion shows a stronger peak; consequently, adding Gr delivers extending crystallinity of Gr nanocompounds. In contrast with LDPE, crystallite dimension and crystallinity of LDPE/Gr are improved. The peaks (1 and 2) of Gr nanocompound 0.5 wt% are stronger than the relevant one for LDPE (Fig. 5) which identify that Gr inclusion not only magnifies the level of crystallinity but also get better the local lattice arrangement of Gr nanocompounds.

Figure 6 offers the TEM result for Gr. The Gr films unevenly have bent at the surface. The pertinent distinctive

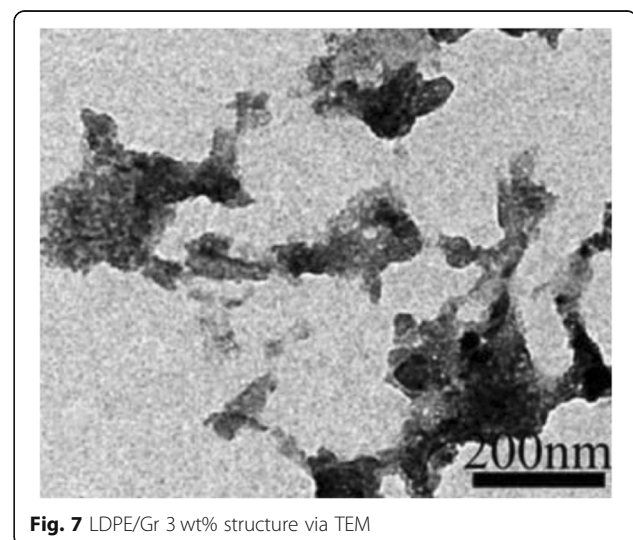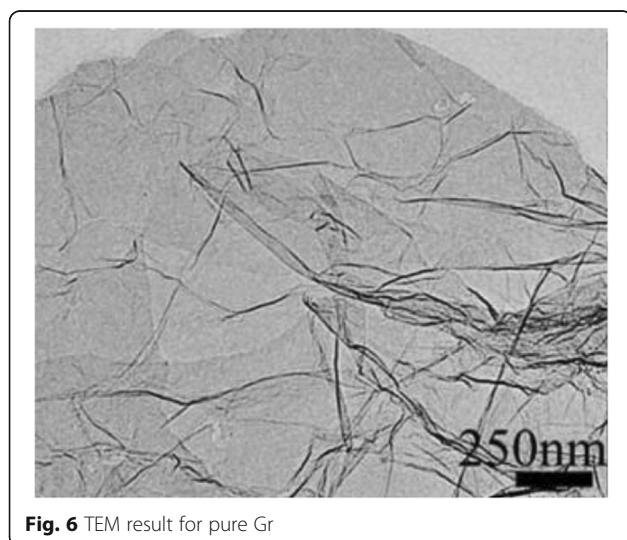

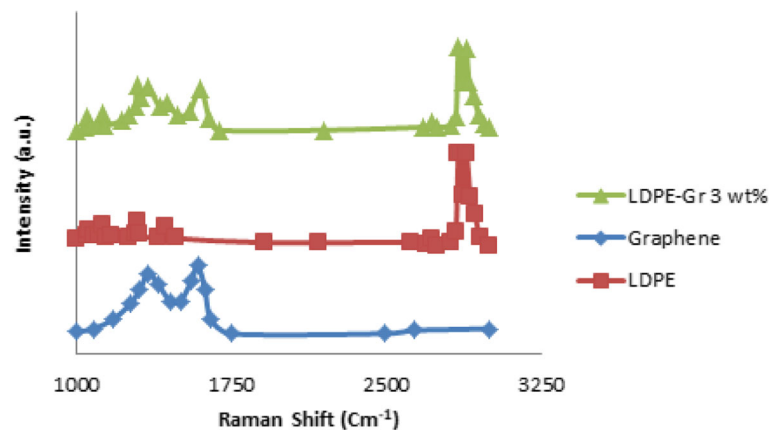


Fig. 8 RS results of Gr, LDPE, and Gr nanocompound

surface structure expedites the level of decreasing accumulations and supports the interactions in LDPE structure.

Gr segments are consistently detached in LDPE, since no obvious accumulation is monitored in the TEM image. The clear lattice borderlines available in Fig. 7 validate the proper spreading of Gr in LDPE structure. In pure graphene, since it was exfoliated, no peak is observed by XRD. But when it was mixed with LDPE, a new peak is observed at 26° which is due to the re-aggregation of graphene sheets. In Fig. 7, where graphene shows agglomerates, TEM confirms this observation.

Figure 8 exhibits a Raman shift of Gr, LDPE, and Gr nanocompound. By giving a demonstration of RS on Gr, the flow arrangement at 1355 cm^{-1} and in the phase vibration of sp^2 carbon atoms at 1590 cm^{-1} are revealed. The 2D bands of Gr disappear on account of particular disarray and weakness of Gr. The key characteristics of

chemical bond in polyethylene are carbon-carbon extending at 1067 cm^{-1} and 1128 cm^{-1} , H-C-H rotating at 1295 cm^{-1} , H-C-H mixing at 1441 cm^{-1} , and C-H extending vibration at $2800\text{--}2900\text{ cm}^{-1}$. The polyethylene link is disclosed through the presence of a C-H group. Raman shifts of Gr nanocompound with 3 wt% hold the characteristic peak points of Gr and LDPE that shows the proper combination of either LDPE or graphene.

Figure 9 exhibits the reduction of activation energy, various degrees of conversion, and Gr inclusion. The energy of activation is a dynamic factor that is relevant to the crystallization of LDPE and correlated with the energy demand for a transmission of crystalline links in LDPE structure. There are also other factors like static factor which have been studied on energy obstruction and nucleation process (Papageorgiou et al., 2018; Xu et al., 2016). The energy of effective activation modifies in different temperatures and different degrees of

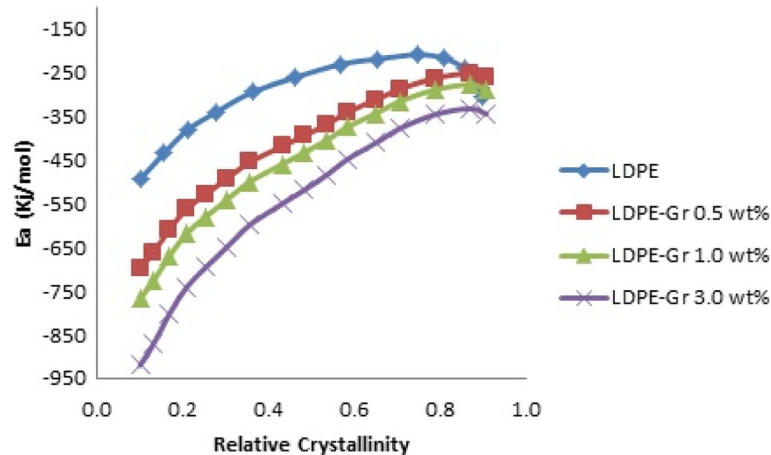


Fig. 9 Energy of activation and relative crystallinity

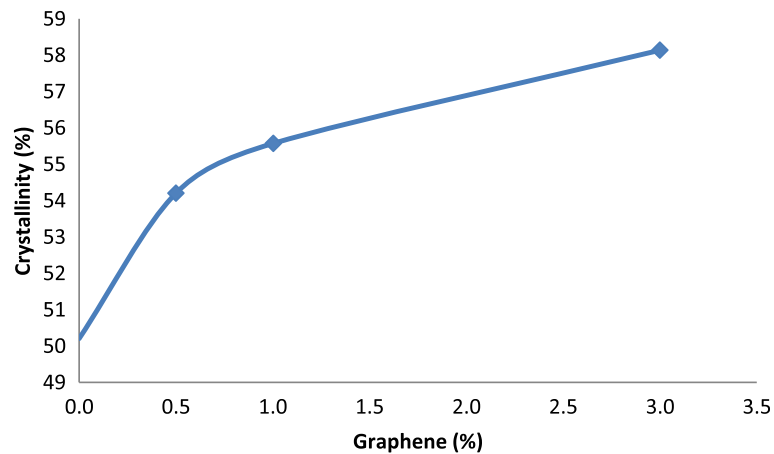


Fig. 10 Alteration in percentage of crystallinity of LDPE and Gr inclusion

conversion in solid-state kinetics which might be as a result of the variation in reaction medium or a number of actions involved in the technique.

Figures 9 and 10 confirm that Gr inclusion either affects in the elevation of crystallinity of LDPE nanocompounds or decrease of activation energy. Consequently, the relative crystallinity of LDPE nanocompounds increase as the amount of Gr inclusion increases too. Figure 10 reveals that Gr inclusion, as a nucleating agent, enhances the percentage of crystallization through nanocompound structures. The most intense peaks with appropriate widths were displayed in the characterization tests. The peak of the Gr and also the peak of the composite (Gr + LDPE) were intense, more like phase transformations occurred, from one phase to another, which shows the amorphous phase of LDPE and the crystalline phase of (Gr + LDPE) composites. However, there must have been at some point the temperature of the transition-vitreous, in the occurrence transformation from one temperature to another,

especially in the polymer matrix. When the Gr was inserted in the polymer matrix, a higher crystallization occurred, which contributed strongly to the beginning of the nucleation process.

Figure 11 indicates that the variations of relative crystallinities of LDPE nanocompounds depend on the temperature alterations and Gr inclusion. Figure 11 exhibits while temperature reduces the level of crystallinity of LDPE nanocompounds increases due to non-isothermal nature of this process (Woehrl, Ochedowski, Gottlieb, Shibasaki, & Schulz, 2014; Xu, Liang, Xiaoling, Guisong, & Ding, 2018; Xu, Zhang, Xu, & Li, 2016; Yimin, Yuzhou, Guoqiang, & Tieling, 2017; Yuan et al., 2017; Zhou, & Gao, 2017; Zhou, Gui, Hu, Jiang, & Tang, 2016; Zhou, Ning, & Wang, 2015; Zhou, Gui, & Hu, 2016). Non-isothermal crystallization takes place at a lesser temperature (122–20 °C) and the rate of growing crystal varies due to various Gr content (0–3 wt%) in LDPE nanocompounds. This phenomenon is justified

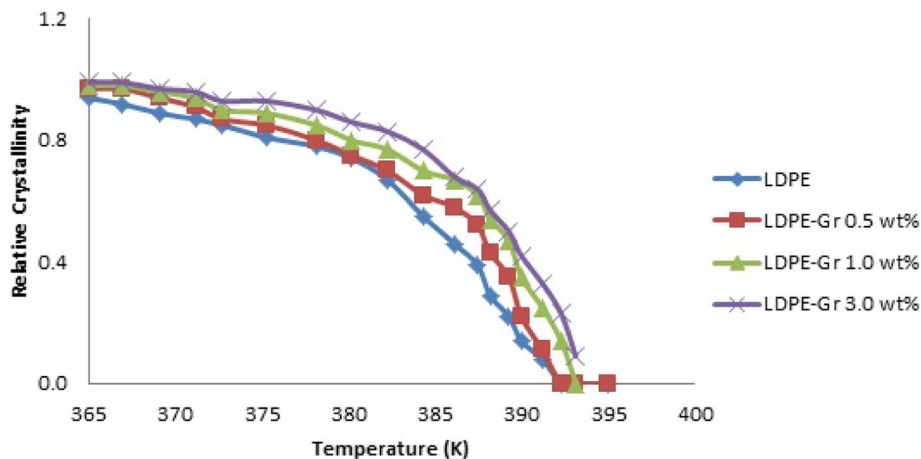


Fig. 11 Relative crystallinity of LDPE and LDPE nanocompounds at different temperatures

due to the existence of Grs in polymer structure which delays the trend of crystallinity reduction in LDPE nanocompounds at higher temperatures. These findings are in line with previous DSC results (Sabet et al., 2019) showing how the addition of Grs to LDPE nucleates crystallization by decreasing activation energy along with increasing onset temperature of crystallization. The inclusion of Gr expanded crystallinity, improved the local lattice order of LDPE/Grs, and advanced Grs' contact with LDPE.

Conclusion

The preparation and characterization of the LDPE/Gr nanocompounds was shown in this research. Gr was spread in LDPE to generate Gr nanocompounds. Little inclusion of Gr (0.5–3.0 wt percent) was recognized as having a superior impact on LDPE characteristics. The combination of Grs and LDPE reduces the activation energy for crystallization considerably and grows nucleation. In LDPE/Gr nanocompounds, there was a significant nucleation improvement based on lower crystallite dimensions and superior kinetics of crystallization. With the inclusion of Grs up to 3 wt% in the LDPE structure, the high crystallinity was achieved. XRD testing was performed to evaluate Gr nanocompounds and outcomes and certify semi-crystalline LDPE setup with spotted peak, as well as the distance between various Gr nanofiller films. With the incorporation of Grs in the LDPE structure, the amplitude of the spotted peak rises. The incorporation of Grs decreases the rate of falling crystallinity at higher temperatures in the LDPE structure, which was demonstrated by the energy activation experiment. The activation energy testing exhibited the increase in relative crystallinity of nanocompounds with the level of Gr inclusion. Meanwhile, Gr's incorporation both expands the crystallinity level and develops the uniformity of nanocompounds in the local lattice. This designed method gave an idea for the preparation of composites of graphene/thermoplastic polymer. It can, therefore, be concluded from the present study that, in order to guarantee the adequate improvement of the mechanical characteristics of the graphene-enhanced LDPE nanocomposites, the Grs need to be optimally dispersed by having a strong mutual long-range interaction. Using graphene as a nanofiller has created a new dimension for producing lightweight, low cost, and high-performance composite materials for a variety of applications.

Abbreviations

Gr: Graphene; RS: Raman spectra; SEM: Scanning electron microscopy; TEM: Transmission electron microscopy; XRD: X-ray diffraction

Acknowledgements

The authors are thankful to acknowledge UTP and UTB for the characterization results.

Authors' contributions

The authors read and corrected the manuscript. All authors read and approved the final manuscript.

Funding

No specific fund was used for this research.

Availability of data and materials

All data analyzed during this study are available from the corresponding author on request.

Competing interests

The authors declare that they have no competing interests.

Author details

¹Petroleum and Chemical Engineering, Universiti Teknologi Brunei (UTB), Bandar Seri Begawan, Brunei Darussalam. ²Faculty of Science and Information Technology, Department of Fundamental and Applied Sciences, Universiti Teknologi PETRONAS (UTP), Bandar Seri Iskandar, Ipoh, Malaysia.

Received: 5 May 2019 Accepted: 19 July 2019

Published online: 14 August 2019

References

- Bengin, M. A. H. (2017). Combined effects of modified polystyrene and unprocessed fly ash on concrete characteristics produced by a novel technique of densification. *World Engineering & Applied Sciences Journal*, 8(3), 118–129.
- Bettina, D., Karen, A. W., Daniel, H., Rolf, M., & Bernhard, S. (2013). Flame retardancy through carbon nanostuffs: Carbon black, multi wall nanotubes, expanded graphite, multi-layer graphene and graphene in polypropylene. *Polymer Degradation and Strength*, 98, 1495–1505.
- Boyd, D. A., Lin, W. H., Hsu, C. C., Teague, M. L., Chen, C. C., Lo, Y. Y., Chan, W. Y., Su, W. B., Cheng, T. C., Chang, C. S., Wu, C. I., & Yeh, N. C. (2015). Single-step deposition of high-mobility graphene at reduced temperature. *Nature Communications*, 6, 6620.
- Chen, X., Ma, C., & Jiao, C. (2016). Enhancement of flame-retardant performance of thermoplastic polyurethane with the incorporation of aluminum hypophosphite and iron-graphene. *Polymer Degradation and Stability*, 129, 275–285.
- Dittrich, B., Wartig, K. A., Hofmann, D., Müllhaupt, R., & Scharrel, B. (2013). Flame retardancy through carbon nanomaterials: Carbon black, multiwall nanotubes, expanded graphite, multi-layer graphene and graphene in polypropylene. *Polymer Degradation and Stability*, 98(8), 1495–1505.
- Feng, Y., He, C., Wen, Y., Ye, Y., Zhou, X., Xie, X., & Mai, Y. W. (2017). Improving thermal and flame retardant properties of epoxy resin by functionalized graphene containing phosphorous, nitrogen and silicon elements. (2017). *Composites Part A: Applied Science and Manufacturing*, 103, 74–83.
- Feng, Y., He, C. H., Wen, Y., Ye, Y., Zhou, X., Xie, X., & Mai, Y. W. (2018). Superior flame retardancy and smoke suppression of epoxy-based composites with phosphorus/nitrogen co-doped graphene. *Journal of Hazardous Materials*, 346, 140–151.
- Hong, N., Song, L., Wang, B., Stec, A. A., Hull, T. R., Zhan, J., & Hu, Y. (2014). Coprecipitation synthesis of reduced graphene oxide/NiAl-layered double hydroxide hybrid and its application in flame retarding poly (methyl methacrylate). *Materials Research Bulletin*, 49, 657–664.
- Hosseini, S. N., Shuker, M. T., Sabet, M., Zamani, A., Hosseini, Z., & Shabib, A. A. (2015). Brine ions and mechanism of low salinity water injection in enhanced oil recovery: A review. *Research Journal of Applied Sciences, Engineering and Technology*, 11(11), 1257–1264.
- Huang, G., Chen, S., Liang, H., Wang, X., & Gao, J. (2013). Combination of graphene and montmorillonite reduces the flammability of poly (vinyl alcohol) nanocomposites. *Applied Clay Science*, 80–81, 433–437.
- Huang, G., Chen, S., Song, P., Lu, P., Wu, C., & Liang, H. (2014). Combination effects of graphene and layered double hydroxides on intumescent flame-retardant poly (methyl methacrylate) nanocomposites. *Applied Clay Science*, 88–89, 78–85.
- Huang, G., Wang, S., Song, P., Wu, C., Chen, S., & Wang, X. (2014a). Combination effect of tubes with graphene on intumescent flame-retardant polypropylene nanocomposites. *Composites Part A: Applied Science and Manufacturing*, 59, 18–25.
- Huang, G., Wang, S., Song, P., Wu, C., Chen, S., & Wang, X. (2014c). Combination effect of carbon nanotubes with graphene on intumescent flame-retardant polypropylene nanocomposites. *Composites Part A: Applied Science and Manufacturing*, 59, 18–25.
- Kaindl, R., Jakopic, G., Resel, R., Pichler, J., Fian, A., Fislthaler, E., Grogger, W., Bayer, B. C., Fischer, R., & Waldhauser, W. (2015). Synthesis of graphene-layer nanosheet coatings by PECV. *Materials Today: Proceedings*, 2, 4247–4255.

- Kuo, Y. L., Chen, F. K., Hsu, C. K., Chia, H. C., Ming, Y. S., Jia, M. Y., & Chin, L. C. (2014). Preparation and properties of novel epoxy/graphene oxide nanosheets (GON) compounds functionalized with flame retardant containing phosphorus and silicon. *Stuffs Chemistry and Physics*, *146*, 354–362.
- Li, K. Y., Kuan, C. F., Kuan, H. C., Chen, C. H., Shen, M. Y., Yang, J. M., & Chiang, C. L. (2014). Preparation and properties of novel epoxy/graphene oxide nanosheets (GON) composites functionalized with flame retardant containing phosphorus and silicon. *Materials Chemistry and Physics*, *146*(3), 354–362.
- Lia, Z., González, A. J., Heeralala, V. B., & Wang, D. Y. (2018). Covalent assembly of MCM-41 nanospheres on graphene oxide for improving fire retardancy and mechanical property of epoxy resin. *Composites Part B Engineering*, *138*, 101–112.
- Liu, S., Fang, Z., Yan, H., Chevali, V. S., & Wang, H. (2016). Synergistic flame retardancy effect of graphene nanosheets and traditional retardants on epoxy resin. *Composites Part A: Applied Science and Manufacturing*, *89*, 26–32.
- Liu, S., Yan, H., Fang, Z., & Wang, H. (2014). Effect of graphene nanosheets on morphology, thermal stability and flame retardancy of epoxy resin. *Composites Science and Technology*, *90*, 40–47.
- Mazyar, S., & Hassan, S. (2018). Thermal, electrical and characterization effects of graphene on the properties of low-density polyethylene composites. *International Journal of Plastics Technology*, *22*(2), 234–246.
- Mazyar, S., Hassan, S., & Erfan, M. (2018). Effect of graphene and carbon nanotube on low-density polyethylene nanocomposites. *Journal of Vinyl and Additive Technology*. <https://doi.org/10.1002/vnl.21643>.
- Mazyar, S., Hassan, S., & Hosseini, S. (2018). Effect of addition graphene to ethylene vinyl acetate and low-density polyethylene. *Journal of Vinyl and Additive Technology*, *24*, E177–E185.
- Papageorgiou, D. G., Terzopoulou, Z., Fina, A., George, F. C., Papageorgiou, Z., Bikiaris, D. K., Chrissafis, K., Young, R. J., & Kinloch, I. A. (2018). Enhanced thermal and fire retardancy properties of polypropylene reinforced with a hybrid graphene/glass-fibre filler. *Composites Science and Technology*, *156*, 95–102.
- Sabet, M., Hassan, A., & Ratnam, C. T. (2013b). Electron-beam irradiation of low density polyethylene/ethylene vinyl acetate blends. *Journal of Polymer Engineering*, *33*, 149–161.
- Sabet, M., Hassan, A., & Ratnam, C. T. (2013c). Effect of zinc borate on flammability/thermal properties of ethylene vinyl acetate filled with metal hydroxides. *Journal of Reinforced Plastics and Composites*, *32*(15), 1122–1128.
- Sabet, M., Hassan, A., & Ratnam, C. T. (2015/2013). Properties of ethylene–vinyl acetate filled with metal hydroxide. *Journal of Elastomers & Plastics*, *47*(1), 88–100.
- Sabet, M., Savory, R. M., Hassan, A., & Chantara, T. R. (2013). The effect of TMPTMA addition on electron-beam irradiated LDPE, EVA and blend properties. *International Polymer Processing*, *28*(4), 386–392.
- Sabet, M., & Soleimani, H. (2014). Mechanical and electrical properties of low density polyethylene filled with carbon nanotubes. *IOP Conference Series: Materials Science and Engineering*, *64*, 1–8.
- Sabet, M., & Soleimani, H. (2017). The impact of electron beam irradiation on low density polyethylene and ethylene vinyl acetate. *IOP Conference Series: Materials Science and Engineering*, *204*(1), 012005.
- Sabet, M., & Soleimani, H. (2018). Broad studies of graphene and low-density polyethylene composites. *Journal of Elastomers and Plastics*. <https://doi.org/10.1177/0095244318802608>.
- Sabet, M., Soleimani, H., Hassan, A., & Ratnam, C. T. (2014). Electron beam irradiation of LDPE filled with calcium carbonate and metal hydroxides. *Polymer-Plastics Technology and Engineering*, *53*(13), 1362–1366.
- Sabet, M., Soleimani, H., & Seyednooroldin, H. (2016). Properties and characterization of ethylene–vinyl acetate filled with carbon nanotube. *Polymer Bulletin*, *73*, 419–434.
- Sabet, M., Soleimani, H., & Seyednooroldin, H. (2019). Graphene impact of the LDPE characteristics. *Polymer Bulletin*. <https://doi.org/10.1007/s00289-019-02759-2>.
- Sabet, M., & Syafiq, M. (2013). Calcium stearate and alumina trihydrate addition of irradiated LDPE, EVA and blends with electron beam. *Applied Mechanics and Materials*, *290*, 31–37.
- Soleimani, H., Latiff, N. R. A., Yahya, N., Sabet, M., Khodapanah, L., Kozłowski, G., Chuan, L. K., & Guan, B. H. (2016). Synthesis and characterization of yttrium iron garnet (YIG) nanoparticles activated by electromagnetic wave in enhanced oil recovery. *Journal of Nano Research*, *38*, 40–46.
- Soleimani, H., Yahya, N., Baig, M. K., Khodapanah, L., Sabet, M., Burda, M., Oechsner, A., & Awang, M. (2015). Synthesis of carbon nanotubes for oil-water interfacial tension reduction. *Oil and Gas Research*, *1*(1), 1000104.
- Srinivasan, V., Francis, M. L. K., & Purushothaman, T. (2017). Applications of nanotechnology and nanomaterials—a literature review. *World Engineering & Applied Sciences Journal*, *8*(2), 111–114.
- Vijayarathi, P., Suresh, P. P., & Rajaram, G. (2016). Experimental and investigation of nanocomposite coated Ti-C-N surfaces with ball-cratering test method. *World Engineering & Applied Sciences Journal*, *7*(2), 85–91.
- Wang, Z., Wei, P., Qian, Y., & Liu, J. (2014). The synthesis of a novel graphene-based inorganic–organic hybrid flame retardant and its application in epoxy resin. *Composites Part B: Engineering*, *60*, 341–349.
- Woehrl, N., Ochedowski, O., Gottlieb, S., Shibusaki, K., & Schulz, S. (2014). Plasma-enhanced chemical vapor deposition of graphene on copper substrates. *AIP Advances*, *4*, 047128.
- Xu, W., Liang, B., Xiaoling, Z., Guisong, W., & Ding, W. D. (2018). The flame retardancy and smoke suppression effect of a hybrid containing CuMoO₄ modified reduced graphene oxide/layered double hydroxide on epoxy resin. *Journal of Hazardous Materials*, *343*, 364–375.
- Xu, W., Zhang, B., Xu, B., & Li, A. (2016). The flame retardancy and smoke suppression effect of heptaheptamolybdate modified reduced graphene oxide/layered double hydroxide hybrids on polyurethane elastomer. *Composites Part A: Applied Science and Manufacturing*, *91*(Part 1), 30–40.
- Yimin, J., Yuzhou, L., Guoqiang, C., & Tieling, X. (2017). Fire-resistant and highly electrically conductive silk fabrics fabricated with reduced graphene oxide via dry-coating. *Materials & Design*, *133*, 528–535.
- Yuan, B., Fan, A., Yang, M., Chen, X., Hu, Y., Bao, C., Jiang, S., Niu, Y., Zhang, Y., He, S., & Dai, H. (2017). The effects of graphene on the flammability and fire behavior of intumescent flame retardant polypropylene composites at different flame scenarios. *Polymer Degradation and Stability*, *143*, 42–56.
- Zhou, K., & Gao, R. (2017). The influence of a novel two dimensional graphene-like nanomaterial on thermal stability and flammability of polystyrene. *Journal of Colloid and Interface Science*, *500*, 164–171.
- Zhou, K., Gui, Z., Hu, Y., Jiang, S., & Tang, G. (2016). The influence of cobalt oxide–graphene hybrids on thermal degradation, fire hazards and mechanical properties of thermoplastic polyurethane composites. *Composites Part A: Applied Science and Manufacturing*, *88*, 10–18.
- Zhou, S., Ning, M., & Wang, X. (2015). The influence of c-radiation on the mechanical, thermal decomposition, and flame retardant characteristics of EVA/LDPE/ATH blends. *Thermal Analysis and Calorimetry*, *119*, 167–173.
- Zhou, K., Gui, Z., & Hu, Y. (2016). The influence of graphene based smoke suppression agents on reduced fire hazards of polystyrene composites. *Composites Part A: Applied Science and Manufacturing*, *80*, 217–227.

Publisher's Note

Springer Nature remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.

Submit your manuscript to a SpringerOpen® journal and benefit from:

- Convenient online submission
- Rigorous peer review
- Open access: articles freely available online
- High visibility within the field
- Retaining the copyright to your article

Submit your next manuscript at ► [springeropen.com](https://www.springeropen.com)